


7367A

7367A PARELLIPSPHERE 170mm VARIABLE FOCUS SPOTLIGHT


COMPONENT LAYOUT

LEGEND

1. "C" Clamp
2. Heavy Duty Cast Aluminum Yoke
3. Eyebolt For Safety Chain
4. Heat Isolating Shutter Handle
5. Rear Lens Focus Knob
6. Rear Lens Focus Scale
7. Front Lens Focus Scale
8. Front Lens Focus Knob
9. Color Frame Retaining Spring
10. Color Frame Holder
11. Front Access Cover Latch
12. Tilt Locking Knob
13. Lamp Information Decal
14. Lamp Access Knob
15. Gobo Slot


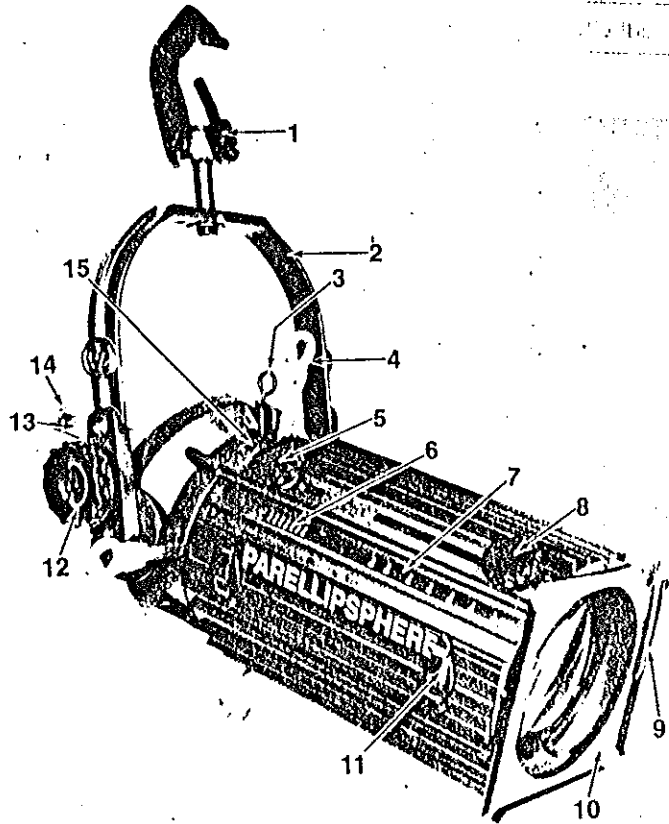


SIZE SPECIFICATIONS

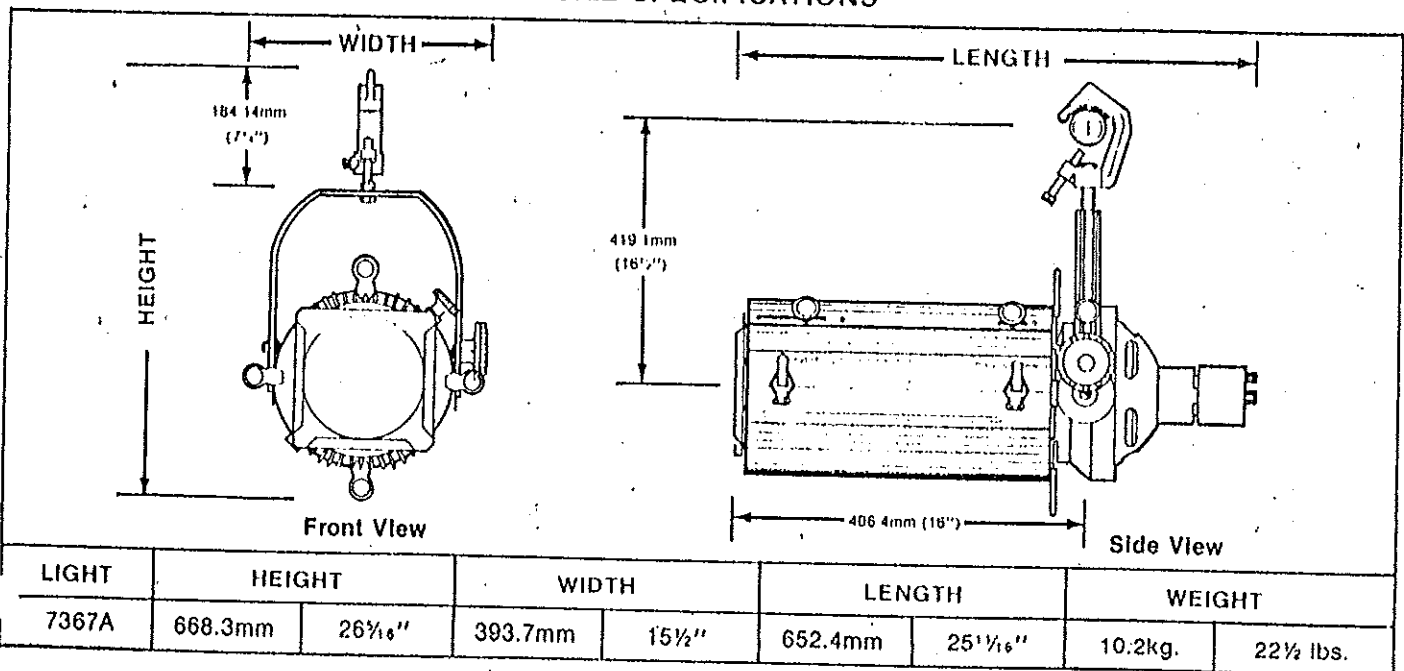



PHOTOMETRICS

NARROWEST BEAM/FIELD 7367A

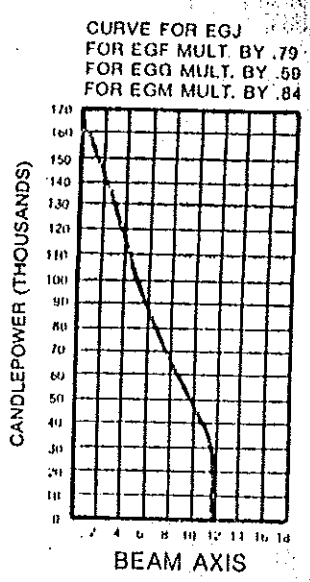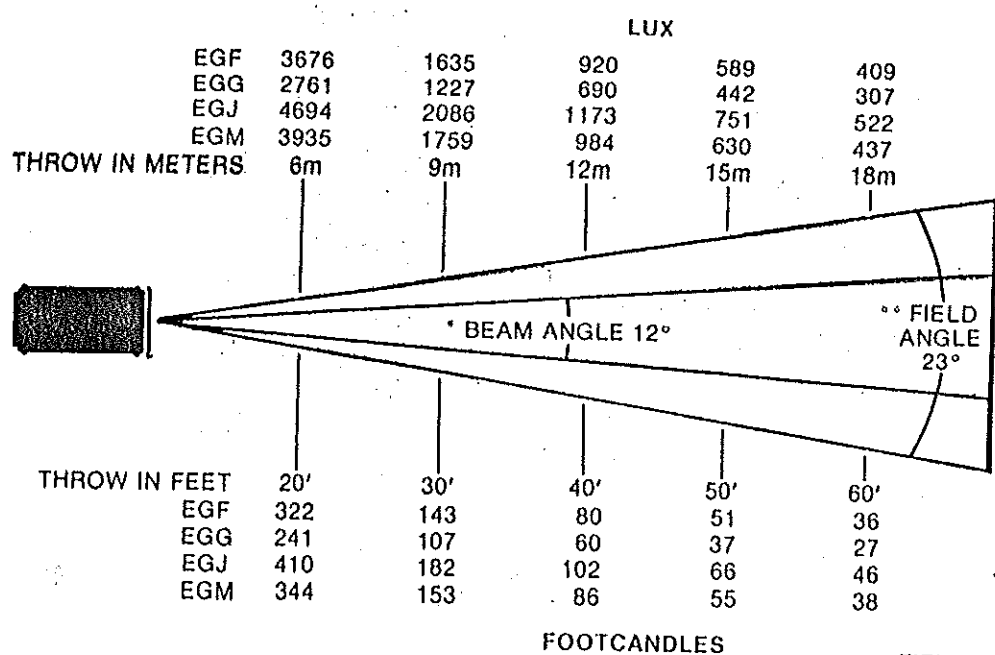

FIELD DIAMETER = THROW x .40
BEAM DIAMETER = THROW x .21

WIDEST BEAM/FIELD 7367A

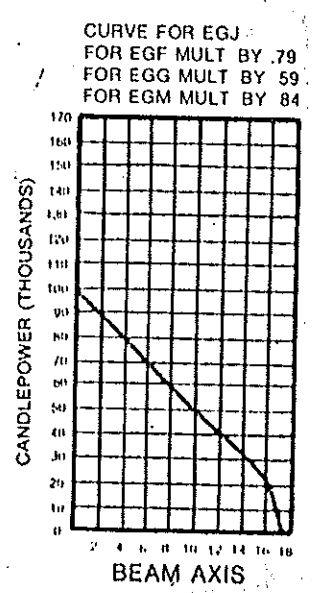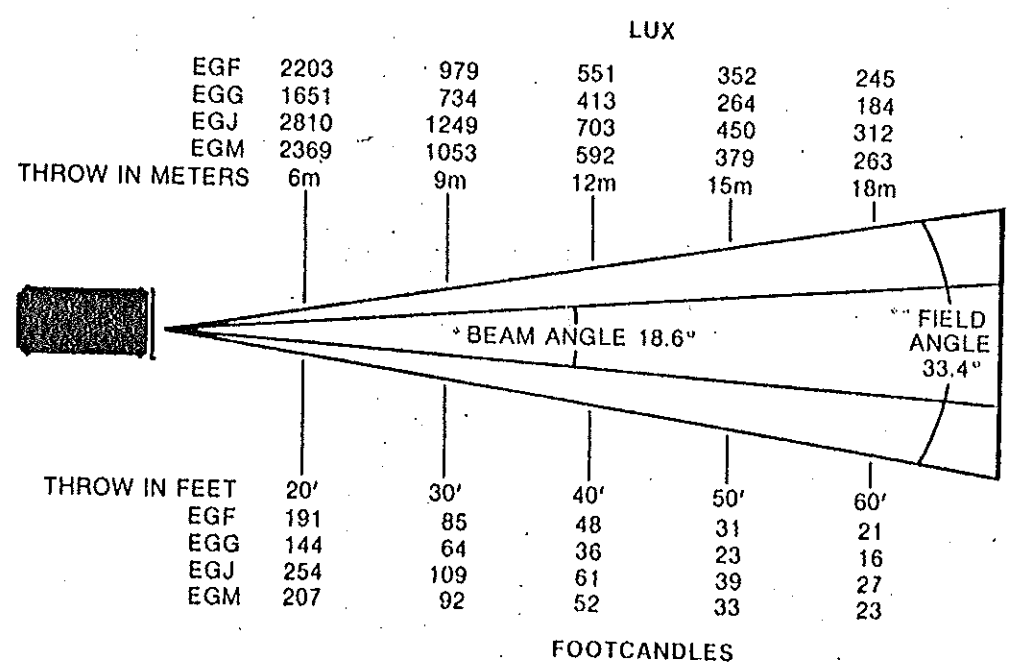

FIELD DIAMETER = THROW x .6
BEAM DIAMETER = THROW x .33

* Where illumination drops to 50% of maximum. ** Where illumination drops to 10% of maximum.